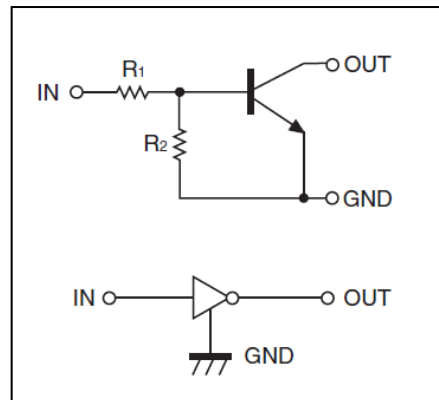


Digital Transistors (Built-in Resistors)





• Equivalent Circuit DIGITAL TRANSISTOR (NPN)

FEATURES

- Built-in bias resistors enable the configuration of an inverter circuit without connecting external input resistors(see equivalent circuit)
- The bias resistors consist of thin-film resistors with complete isolation to allow negative biasing of the input.They also have the advantage of almost completely eliminating parasitic effects
- Only the on/off conditions need to be set for operation, making device design easy



PIN CONNENCTIONS and MARKING

DTC115EE 	SOT-523 1. IN 2. GND 3. OUT	DTC115EUA 	SOT-323 1. IN 2. GND 3. OUT
DTC115EKA 	SOT-23-3L 1. IN 2. GND 3. OUT	DTC115ECA 	SOT-23 1. IN 2. GND 3. OUT

ORDERING INFORMATION

Part Number	MARKING	Package	Packing Method	Pack Quantity
DTC115EE	29	SOT-523	Reel	3000pcs/Reel
DTC115EUA	29	SOT-323	Reel	3000pcs/Reel
DTC115EKA	29	SOT-23-3L	Reel	3000pcs/Reel
DTC115ECA	29	SOT-23	Reel	3000pcs/Reel

MAXIMUM RATINGS(Ta=25°C unless otherwise noted)

Symbol	Parameter	Limits(DTC115E□)				Unit
		E	UA	CA	KA	
V _{CC}	Supply Voltage	50				V
V _{IN}	Input Voltage	-10~+40				V
I _O	Output Current	100				mA
P _D	Power Dissipation	150	200	200	200	mW
T _J , T _{stg}	Operation Junction and Storage Temperature Range	-55~+150				°C

ELECTRICAL CHARACTERISTICS (Ta=25°C unless otherwise specified)

Parameter	Symbol	Conditions	Min	Typ	Max	Unit
Input voltage	V _{I(off)}	V _{CC} =5V, I _O =100μA	0.5			V
	V _{I(on)}	V _O =0.3V, I _O =1mA			3	V
Output voltage	V _{O(on)}	I _O /I _I =5mA/0.25mA			0.3	V
Input current	I _I	V _I =5V			0.15	mA
Output current	I _{O(off)}	V _{CC} =50V, V _I =0			0.5	μA
DC current gain	G _I	V _O =5V, I _O =5mA	82			
Input resistance	R ₁		70	100	130	kΩ
Resistance ratio	R ₂ /R ₁		0.8	1	1.2	
Transition frequency	f _T	V _O =10V, I _O =5mA, f=100MHz		250		MHz



CHINA BASE
INTERNATIONAL

SOT-523/SOT-323/SOT-23-3L/SOT-23



DTC115EE/DTC115EUA/DTC115EKA/DTC115ECA

www.china-base.com.hk

Typical Characteristics

