


Dual Transient Voltage Suppressors for ESD Protection


Features

- SOT-23 Package
- 2 Unidirectional Transil functions
- Peak Power Dissipation 300W @8 x 20 us Pulse
- Low Leakage
- Fast Response Time < 1 ns
- Protects RS232 I/O Port
- ESD Protection to IEC 61000-4-2 Level 4, 15KV(Air), 8KV(Contact)
- 16KV Human Body Model ESD Requirements
- RoHS Compliant in Lead-Free Versions

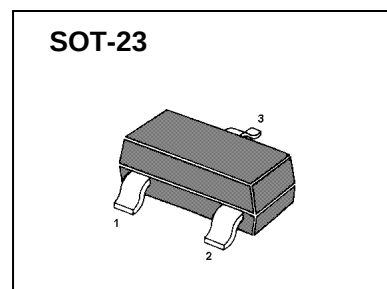

Applications

- Computers
- Printers
- Communication Systems




Absolute Maximum Ratings

Symbol	Parameter	Value	Units
P _{PP}	Peak Pulse Power (t _p = 8/20μs)	300	W
T _L	Maximum lead temperature for soldering during 10s	260	°C
T _{stg}	Storage Temperature Range	-55 to +15	°C
T _{op}	Operating Temperature Range	-40 to +125	°C
T _j	Maximum junction temperature	150	°C
V _{PP}	Electrostatic discharge		
	MIL STD 883C -Method 3015-6	25	kv
	IEC61000-4-2 air discharge	16	
	IEC61000-4-2 contact discharge	9	

Electrical Characteristics

Symbol	Parameter
V_{RM}	Stand-off voltage
V_{BR}	Breakdown voltage
V_{CL}	Clamping voltage
I_{RM}	Leakage current
I_{PP}	Peak pulse current
αT	Voltage temperature coefficient
V_F	Forward voltage drop
C	Capacitance
R_d	Dynamic resistance

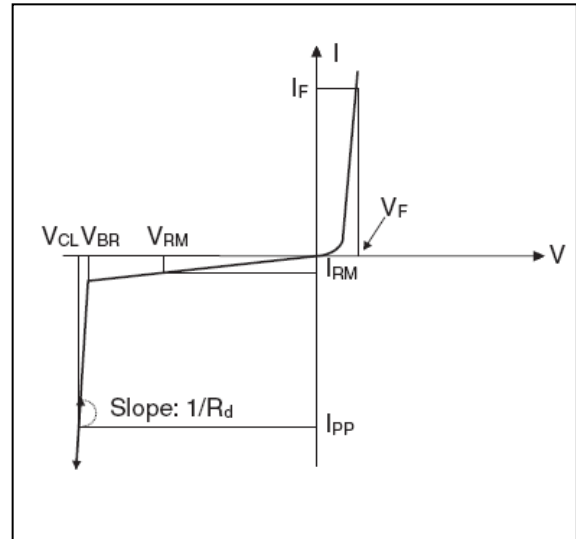

Electrical Characteristics Ratings at 25°C ambient temperature unless otherwise specified.

Part Numbers	Marking	Rated Stand-off Voltage	Maximum Leakage Current	Minimum Breakdown Voltage	Maximum Clamping Voltage		Maximum Pulse Peak Current	Maximum Capacitance
			@ V_{RM}	1mA	1A ¹⁾	5A ¹⁾	tp=8/20us	0v, 1MHz
		V_{RM}	I_{RM}	V_{BR}	V_{CL}		I_{PPM}	C
		V	μA	V	V	V	A	pF
ESDSOT03C	03C	3.3	100	4.0	7.5	10.0	20	500
ESDSOT04C	04C	4.0	20.0	5.0	8.5	10.5	17	300
ESDSOT05C	05C	5.0	20.0	6.0	9.8	12.5	17	220
ESDSOT07C	07C	7.0	5.0	8.5	11.2	13.5	16	200
ESDSOT08C	08C	8.0	5.0	7.5	13.4	15.0	15	190
ESDSOT12C	12C	12.0	1.0	13.3	19.0	28.0	12	150
ESDSOT15C	15C	15.0	1.0	16.7	24.0	35.0	10	140
ESDSOT24C	24C	24.0	1.0	26.7	43.0	60.0	5	83
ESDSOT36C	36C	36.0	1.0	40	60.0	75.0	2	80

1).8/20 waveform used. (see fig2.)

Typical Characteristics

