


## NPN silicon planar high voltage transistor

### Features

- 150 Volt  $V_{CEO}$
- 1 Amp continuous current

### Device marking

N95



1.Base 2.Collector 3.Emitter  
SOT-89 Plastic Package

### Absolute maximum ratings

Parameter	Symbol	Value	Unit
Collector-base voltage	$V_{CBO}$	170	V
Collector-emitter voltage	$V_{CEO}$	150	V
Emitter-base voltage	$V_{EBO}$	5	V
Continuous collector current	$I_C$	1	A
Peak pulse current	$I_{CM}$	2	A
Base current	$I_B$	200	mA
Power dissipation at $T_{amb} = 25^\circ\text{C}$	$P_{tot}$	1	W
Operating and storage temperature range	$T_j; T_{stg}$	-65 to +150	$^\circ\text{C}$

### Electrical characteristics (at $T_{amb} = 25^\circ\text{C}$ )





Parameter	Symbol	Min.	Max.	Unit	Conditions
Breakdown voltages	$V_{(BR)CBO}$	170		V	$I_C=100\mu\text{A}$
	$V_{CEO(sus)}$	150		V	$I_C=10\text{mA}^{(*)}$
	$V_{(BR)EBO}$	5		V	$I_E=100\mu\text{A}$
Collector cut-off currents	$I_{CBO}, I_{CES}$		100	nA	$V_{CB}=150\text{V}, V_{CE}=150\text{V}$
Emitter cut-off current	$I_{EBO}$		100	nA	$V_{EB}=4\text{V}$
Emitter saturation voltages	$V_{CE(sat)}$		0.2	V	$I_C=250\text{mA}, I_B=25\text{mA}^{(*)}$
			0.3	V	$I_C=500\text{mA}, I_B=50\text{mA}^{(*)}$
	$V_{BE(sat)}$		1.0	V	$I_C=500\text{mA}, I_B=50\text{mA}^{(*)}$
Base-emitter turn on voltage	$V_{BE(on)}$		1.0	V	$I_C=500\text{mA}, V_{CE}=10\text{V}^{(*)}$
Static forward current transfer ratio	$h_{FE}$	100	300		$I_C=1\text{mA}, V_{CE}=10\text{V}$
		100			$I_C=250\text{mA}, V_{CE}=10\text{V}^{(*)}$
		50			$I_C=500\text{mA}, V_{CE}=10\text{V}^{(*)}$
		10			$I_C=1\text{A}, V_{CE}=10\text{V}^{(*)}$
Transition frequency	$f_T$	100		MHz	$I_C=50\text{mA}, V_{CE}=10\text{V}$ $f=100\text{MHz}$
Collector-base breakdown voltage	$C_{obo}$		10	pF	$V_{CB}=10\text{V}, f=1\text{MHz}$

#### NOTES:

(\*) Measured under pulsed conditions. Pulse width = 300 $\mu\text{s}$ . Duty cycle  $\leq 2\%$






## FCX495

### Typical characteristics

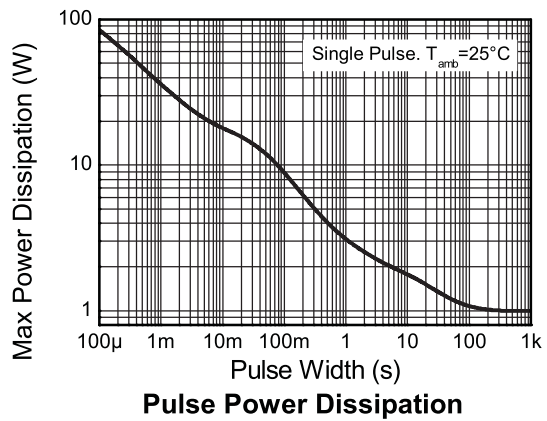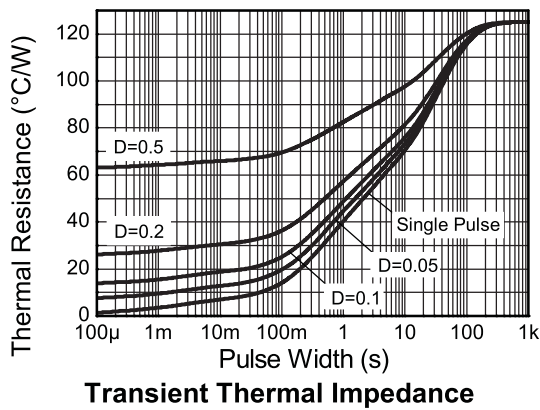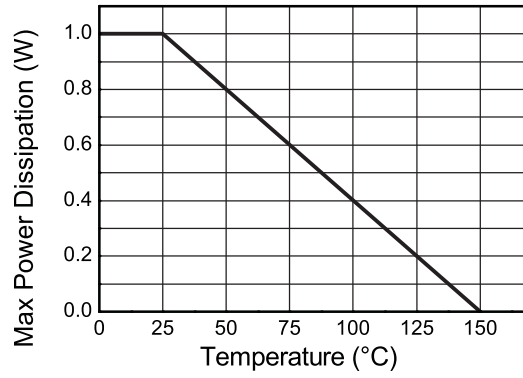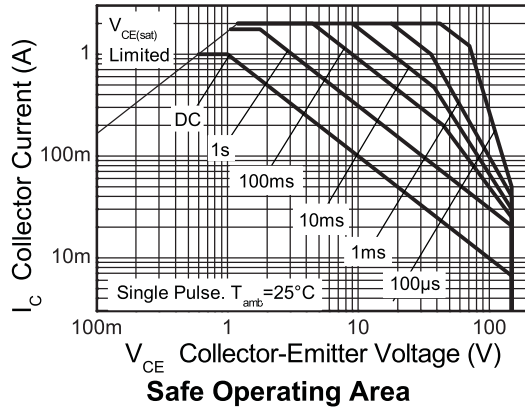


## FCX495

### Typical characteristics

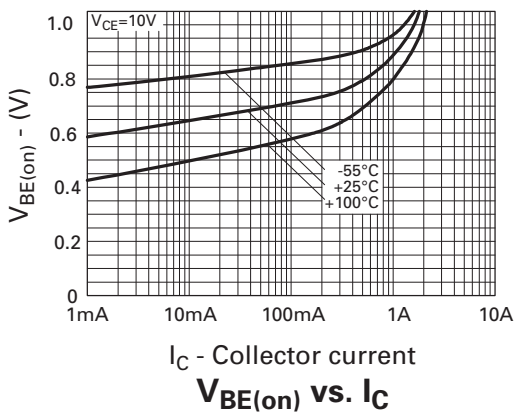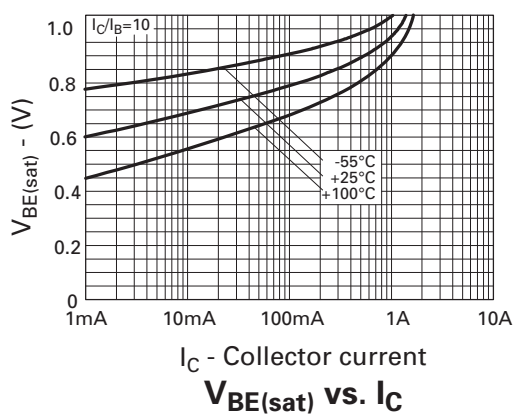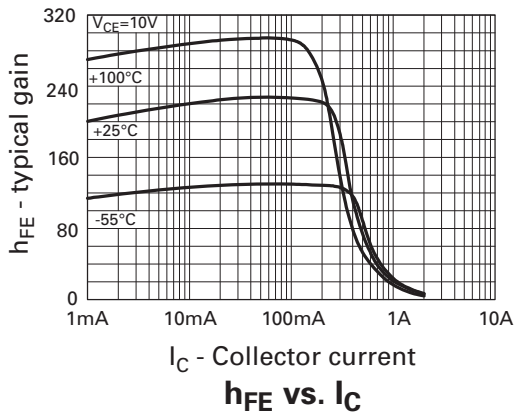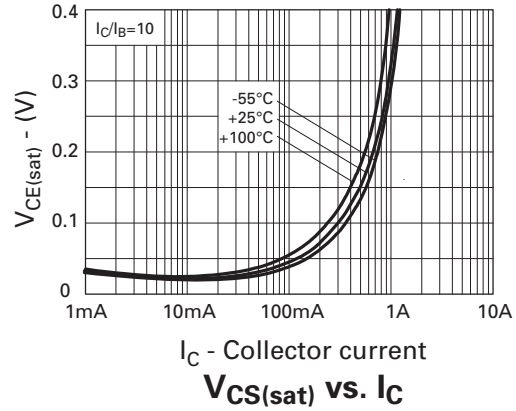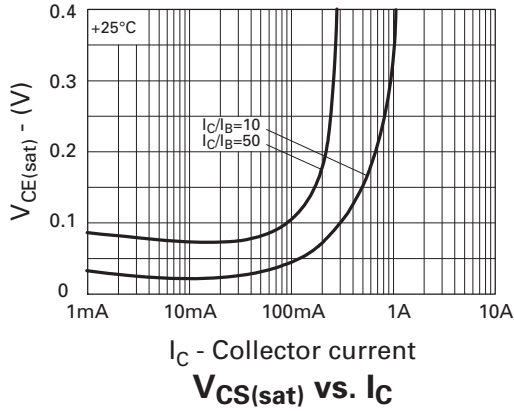

## SOT-89 PACKAGE OUTLINE

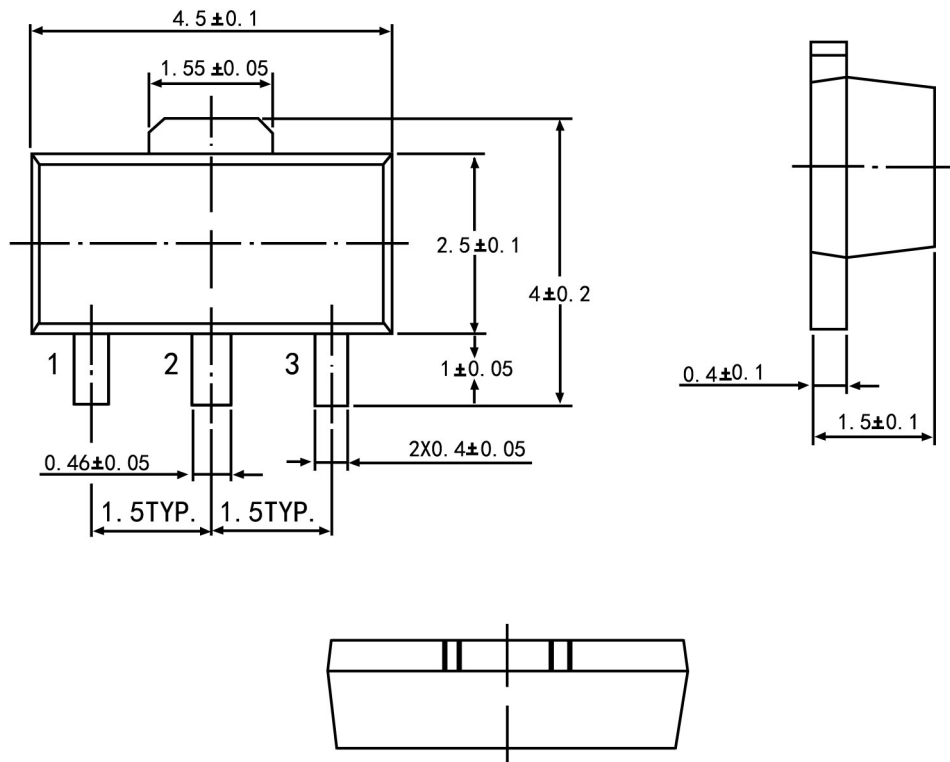

Symbol	Dimension in Millimeters	
	Min	Max
A	1.40	1.60
B	0.44	0.62
B1	0.35	0.54
C	0.35	0.44
D	4.40	4.60
D1	1.62	1.83
E	2.29	2.60
e	1.50 Typ	
H	3.94	4.25
H1	2.63	2.93
L	0.89	1.20
All Dimensions In mm		