

## Encapsulate Three Terminal Voltage Regulators

Three-terminal positive voltage regulator

### FEATURES

Maximum output current


$$I_{OM}: 0.1 \text{ A}$$

Output voltage

$$V_O: 18 \text{ V}$$

Continuous total dissipation

$$P_D: 0.5 \text{ W}$$



1.OUT 2.GND 3.IN  
SOT-89 Plastic Package


### ABSOLUTE MAXIMUM RATINGS (Operating temperature range applies unless otherwise specified)

Parameter	Symbol	Value	Unit
Input Voltage	$V_i$	35	V
Operating Junction Temperature Range	$T_{OPR}$	0~+150	°C
Storage Temperature Range	$T_{STG}$	-55~+150	°C

### ELECTRICAL CHARACTERISTICS AT SPECIFIED VIRTUAL JUNCTION TEMPERATURE ( $V_i=26\text{V}, I_o=40\text{mA}, C_i=0.33\mu\text{F}, C_o=0.1\mu\text{F}$ , unless otherwise specified)

Parameter	Symbol	Test conditions	Min	Typ	Max	Unit	
Output voltage	$V_o$	$25^\circ\text{C}$	17.3	18	18.7	V	
		$20.5\text{V} \leq V_i \leq 33\text{V}, I_o=1\text{mA}-40\text{mA}$	0-125°C	17.1	18	18.9	V
		$V_i=26\text{V}, I_o=1\text{mA}-70\text{mA}$		17.1	18	18.9	V
Load Regulation	$\Delta V_o$	$I_o=1\text{mA}-100\text{mA}, V_i=26\text{V}$	25°C	27	180	mV	
		$I_o=1\text{mA}-40\text{mA}, V_i=26\text{V}$	25°C	19	90	mV	
Line regulation	$\Delta V_o$	$20.5\text{V} \leq V_i \leq 33\text{V}, I_o=40\text{mA}$	25°C	70	360	mV	
		$22\text{V} \leq V_i \leq 33\text{V}, I_o=40\text{mA}$	25°C	64	300	mV	
Quiescent Current	$I_q$		25°C	4.7	6.5	mA	
Quiescent Current Change	$\Delta I_q$	$22\text{V} \leq V_i \leq 33\text{V}, I_o=40\text{mA}$	0-125°C		1.5	mA	
	$\Delta I_q$	$1\text{mA} \leq I_o \leq 40\text{mA}, V_i=26\text{V}$	0-125°C		0.1	mA	
Output Noise Voltage	$V_N$	$10\text{Hz} \leq f \leq 100\text{KHz}$	25°C	89		$\mu\text{V}$	
Ripple Rejection	RR	$21.5\text{V} \leq V_i \leq 31.5\text{V}, f=120\text{Hz}$	0-125°C	32	36	dB	
Dropout Voltage	$V_d$	$T_j=25^\circ\text{C}$	25°C	1.7		V	


### TYPICAL APPLICATION

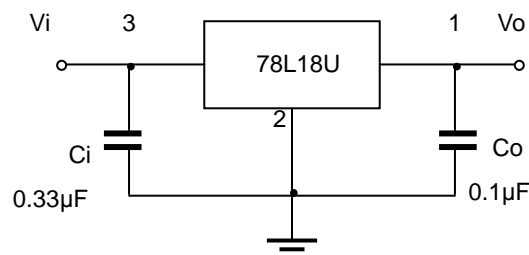

Note: Bypass capacitors are recommended for optimum stability and transient response and should be located as close as possible to the regulators.



## SOT-89 PACKAGE OUTLINE

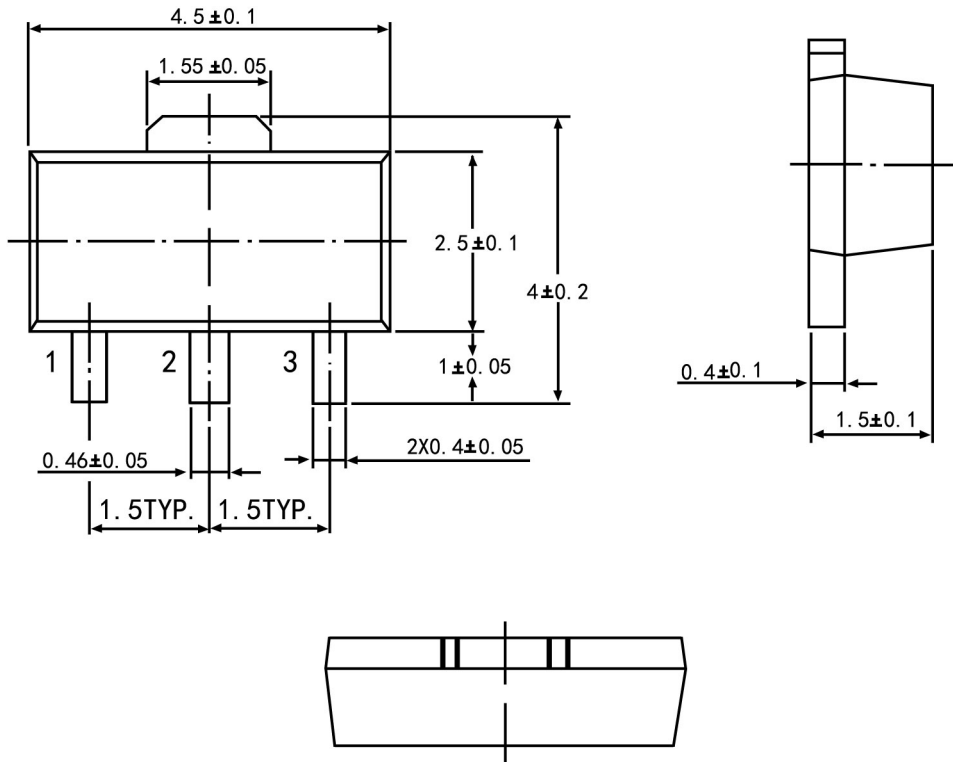

Symbol	Dimension in Millimeters	
	Min	Max
A	1.40	1.60
B	0.44	0.62
B1	0.35	0.54
C	0.35	0.44
D	4.40	4.60
D1	1.62	1.83
E	2.29	2.60
e	1.50 Typ	
H	3.94	4.25
H1	2.63	2.93
L	0.89	1.20
All Dimensions In mm		